

EFFORTLESS. EFFICIENT

EXPERIENCE THE JOY OF WASHING

Smart wash turbo


AUTOMATIC TWO WHEELER WASHER



PROVIDING WASHING SOLUTIONS SINCE 1960'S

Low Water Consumption | Quick Washing | Less Manpower | Superior Wash

EFFORTLESS. EFFICIENT

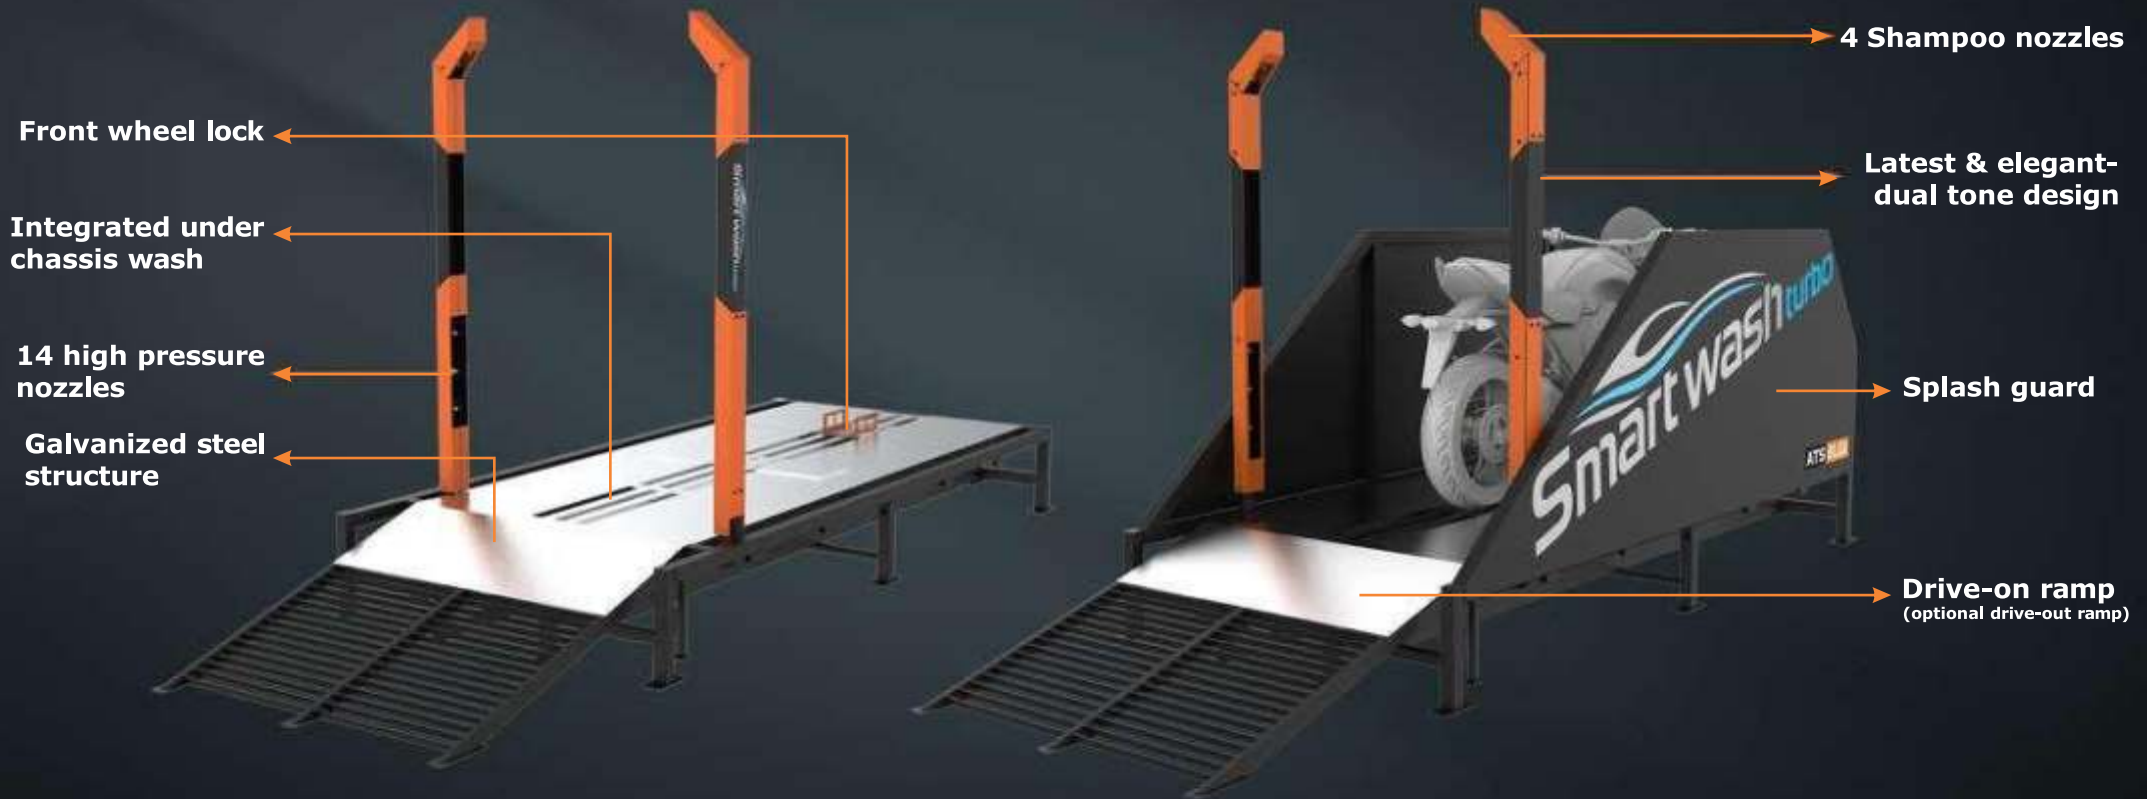

Optional accessories

Drive out ramp | Foam lance | Splash guard

TECHNICAL SPECIFICATION

ATS ELGI™

PARAMETER

VALUE

Water pump working pressure	17±2 bar / 40±2 bar
Max. washable bike dimensions	2210 X 1360 X 890 mm
Max. water consumption per bike	45 L
Max. shampoo consumption per bike	20 ml
Cycle time per bike (without wiping)	52±2 sec
No. of water nozzles	14 Nos
NO. of shampoo nozzles	4 Nos
Gun for wheel arch cleaning	1 Nos
Input supply voltage	3Ø, 415+10%/-15%
Frequency	50±5%
Power requirement	7.5 hp / 10 hp
Space required	4100(L)X1450(W)X2050(H)mm
Inlet water connection	1 1/2"(M)
Compressed air requirement	6-8 bar
Inlet air connection	1/2" (F)



SPECIAL FEATURES



LESS WATER
CONSUMPTION



LESS MAN
POWER



SUPERIOR WASH
QUALITY



GENTLE AND
SAFE



QUICK
WASH



MANUAL SENSING
PLATE TO DETECT THE
VEHICLE LENGTH

ATS ELGI

Private Industrial Estate, Kurichy,
Coimbatore - 641021, Tamil Nadu, India.

Visit us at : www.ats-elgi.com | Email : enquiry@ats-elgi.com

Toll Free Number : **1800-203-3544**

Follow us on :     

